

## innesti rapidi

### quick release couplings


codice	A	B	C	D	E	F	press. es.
code	mm	mm	mm	mm	mm	BSP	work pr. bar

### con tenuta a sfera ball type

serie **IR4120**

**IR4120 series**

solo su richiesta - in lotti da definire  
upon request only - lots to be fixed

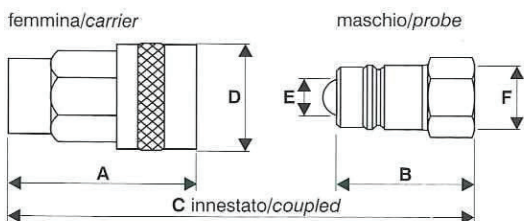

le parti maschio (B) e femmina (A) sono codificate come segue  
parte maschio: IR412006/M  
parte femmina: IR412006/F

*in case of separate order for probe (B) or carrier (A)  
the code have to be completed by adding /M or /F  
to the above mentioned ones*


*(e.g. IR412006/M for 1/4" probe and IR412006/F for 1/4" carrier)*

IR412006	52	35	70	27	7.3	1/4"	350
IR412010	60	40	81	34	9.2	3/8"	300
IR412015	67	46	91	38	12.5	1/2"	280
IR412019	82	53	106	45	17.0	3/4"	220
IR412025	100	66	132	56	21.0	1"	220

### con valvola a faccia piana flat face valve

serie **IR9020**

**IR9020 series**

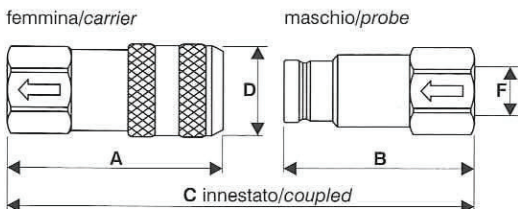

le parti maschio (B) e femmina (A) sono codificate come segue  
parte maschio: IR902010/M  
parte femmina: IR902010/F

*in case of separate order for probe (B) or carrier (A)  
the code have to be completed by adding /M or /F  
to the above mentioned ones*

*(e.g. IR902010/M for 3/8" probe and IR902010/F for 3/8" carrier)*

IR902010	75.5	62.5	119	31		3/8"	250
IR902015	75.5	62.5	119	31		1/2"	250

- gli innesti rapidi serie IR9020 hanno caratteristiche di alta robustezza, adatti quindi per alte pressioni di esercizio ed elevate portate
- le perdite di fluido durante l'innesto ed il disinnesto risultano minime in funzione della valvola a faccia piana
- la parte femmina è dotata di aggancio di sicurezza della ghiera
- *the IR9020 series quick release couplings are of very solid construction, they suit then high working pressure and substantial flow rate*
- *possible fluid leaks are very little when the couplings are connected and disconnected*
- *the female part sleeve is provided of safety lock*