
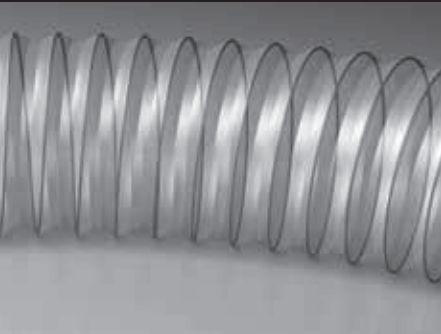


PU ANTI-STATIC DRY FOOD GRADE					
	NOM I.D (mm)	NOM I.D (inches)	Min.Bend Radius (mm)	NOM WALL	Coil Length (m)
<p>Constructed from an antistatic compound to reduce risk from static shock and spark hazards and is electrically rated as 10<sup>8</sup> Ohms/m<sup>2</sup>. Dry food grade rated and has excellent abrasion resistance. Translucent to enable sight of conveyance.</p> <p>Colour / Translucent Temperature Range / -30 °C to 100 °C Material / Polyurethane Electrical</p> 	39	1 <sup>1</sup> / <sub>2</sub>	80	0.6	10
	51	2	102	0.6	10
	63	2 <sup>1</sup> / <sub>2</sub>	126	0.6	10
	76	3	152	0.6	10
	89	3 <sup>1</sup> / <sub>2</sub>	178	0.6	10
	102	4	204	0.6	10
	114	4 <sup>1</sup> / <sub>2</sub>	228	0.6	10
	127	5	254	0.6	10
	152	6	304	0.6	10
	178	7	356	0.6	10
	203	8	406	0.6	10
	229	9	458	0.6	10
	254	10	508	0.6	10
	305	12	610	0.6	10
	356	14	712	0.6	10
	381	15	762	0.6	10
	406	16	812	0.6	10
457	18	914	0.6	10	
508	20	1016	0.6	10	
559	22	1118	0.6	10	
600			1220	0.6	10

Sizes from 356ml to 600mm manufactured to order.

LIGHT WEIGHT PU					
	NOM I.D (mm)	NOM I.D (inches)	Min.Bend Radius (mm)	NOM WALL	Coil Length (m)
<p>PULW is constructed from a dry food grade polyurethane with wire helix reinforcement. It is ideal for conveying dry food and particles.</p> <p>Colour / Translucent Temperature Range / -30 °C to 100 °C Material / Polyurethane</p> 	39	1 <sup>1</sup> / <sub>2</sub>	80	0.5	10
	51	2	102	0.5	10
	63	2 <sup>1</sup> / <sub>2</sub>	126	0.5	10
	76	3	152	0.5	10
	89	3 <sup>1</sup> / <sub>2</sub>	178	0.5	10
	102	4	204	0.5	10
	114	4 <sup>1</sup> / <sub>2</sub>	228	0.5	10
	127	5	254	0.5	10
	152	6	304	0.5	10
	178	7	356	0.5	10
	203	8	406	0.5	10
	229	9	458	0.5	10
	254	10	508	0.5	10
	305	12	610	0.5	10

Sizes from 356ml to 600mm manufactured to order.

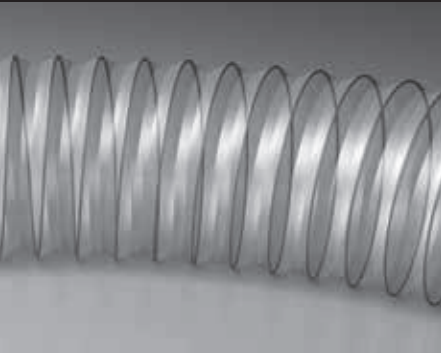